

FIG. 1A is a perspective view of a vehicle interior. It shows a seat 10 with a headrest 11 and a backrest 12. A seat belt 20 is shown with a buckle 21 and a latch 22. A seat cushion 30 is shown with a headrest 31 and a backrest 32. A seat base 50 is shown with a headrest 51 and a backrest 52. A seat frame 100 is shown with a headrest 101 and a backrest 102.

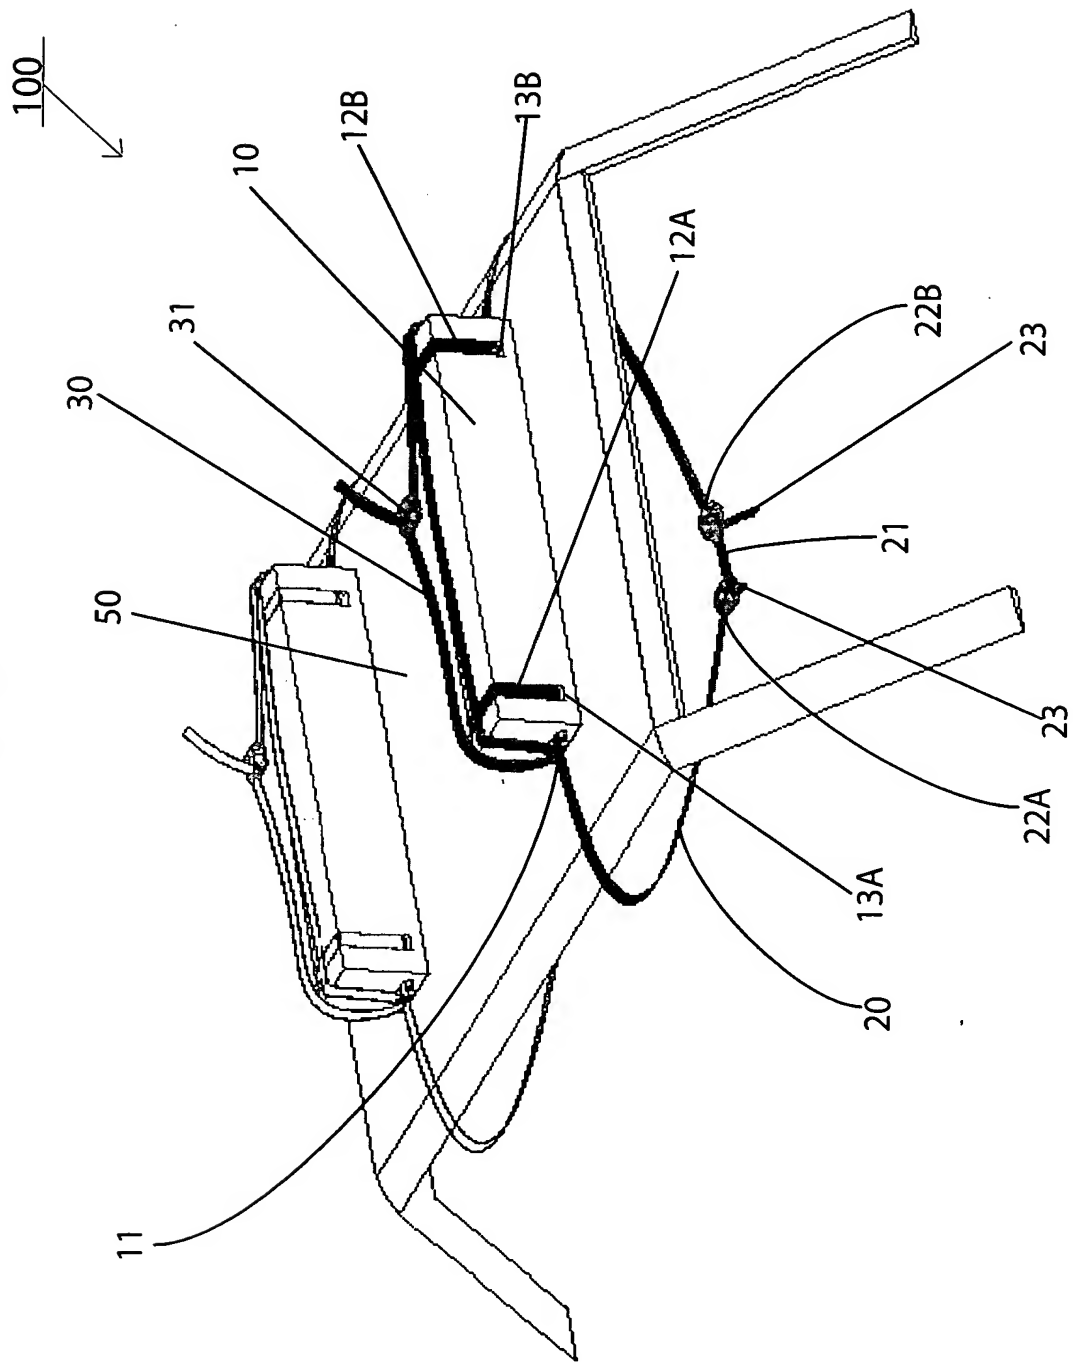


FIG. 1B

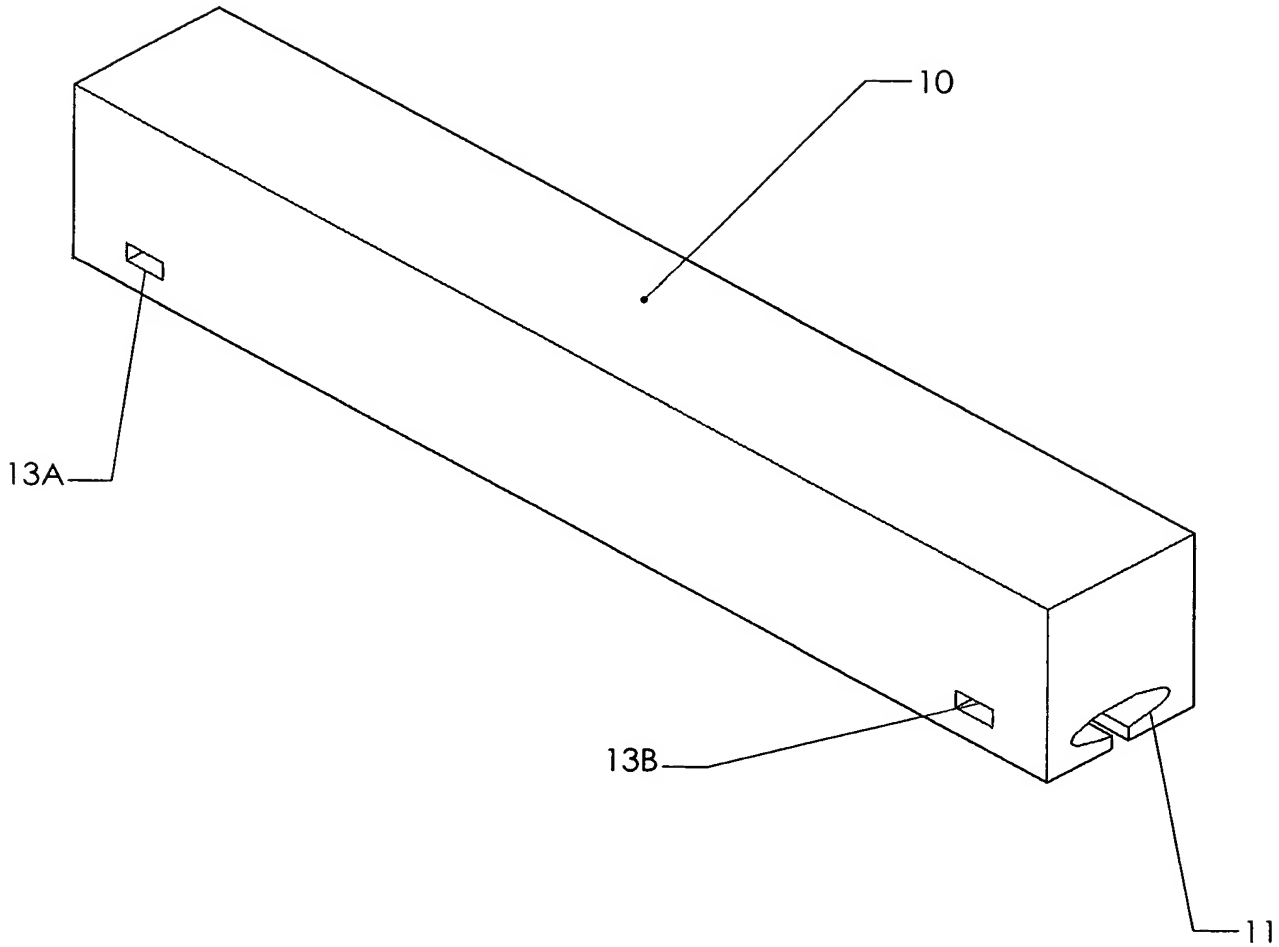


FIG. 2

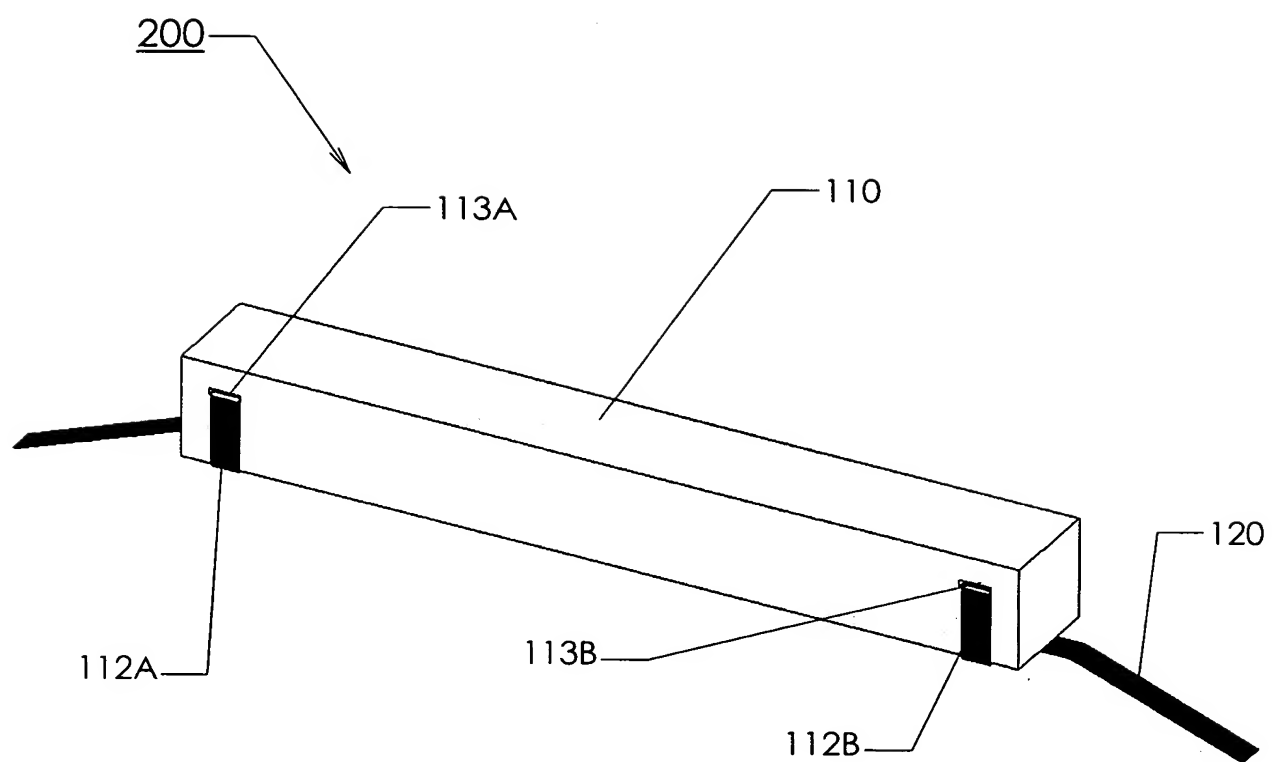


FIG. 3A

300

332A

324B

333A

331

333B

332B

A

324B

320

325A

324A

312B

325B

312A

(Detail Area 'A' from FIG 3A)

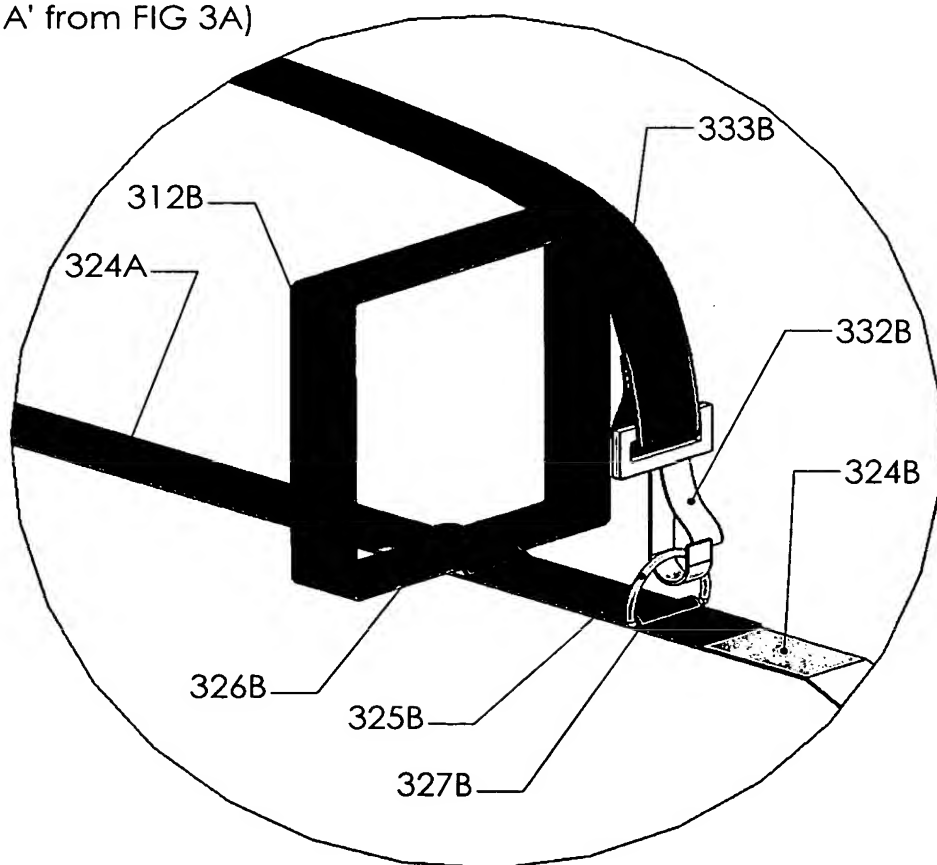


FIG. 4A

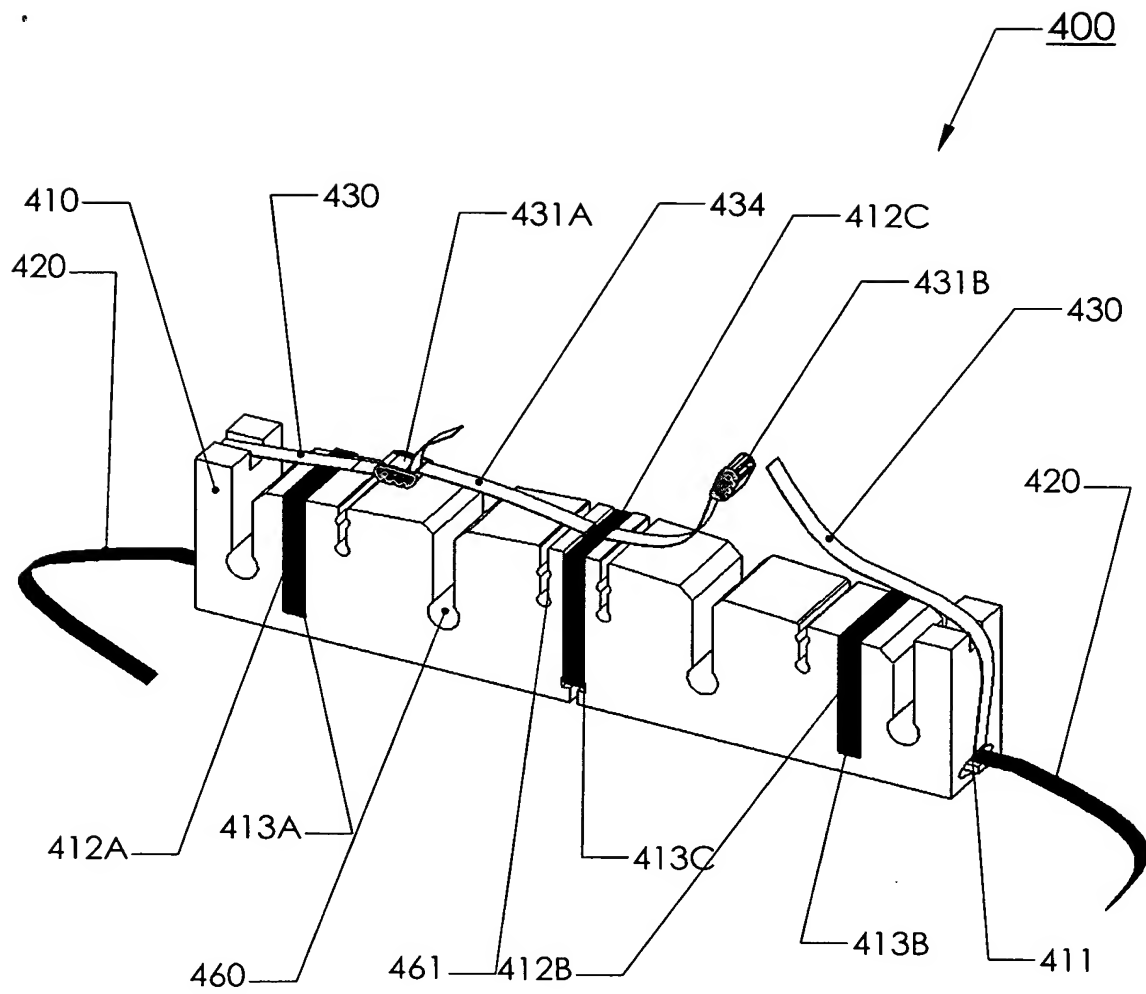


FIG. 4B

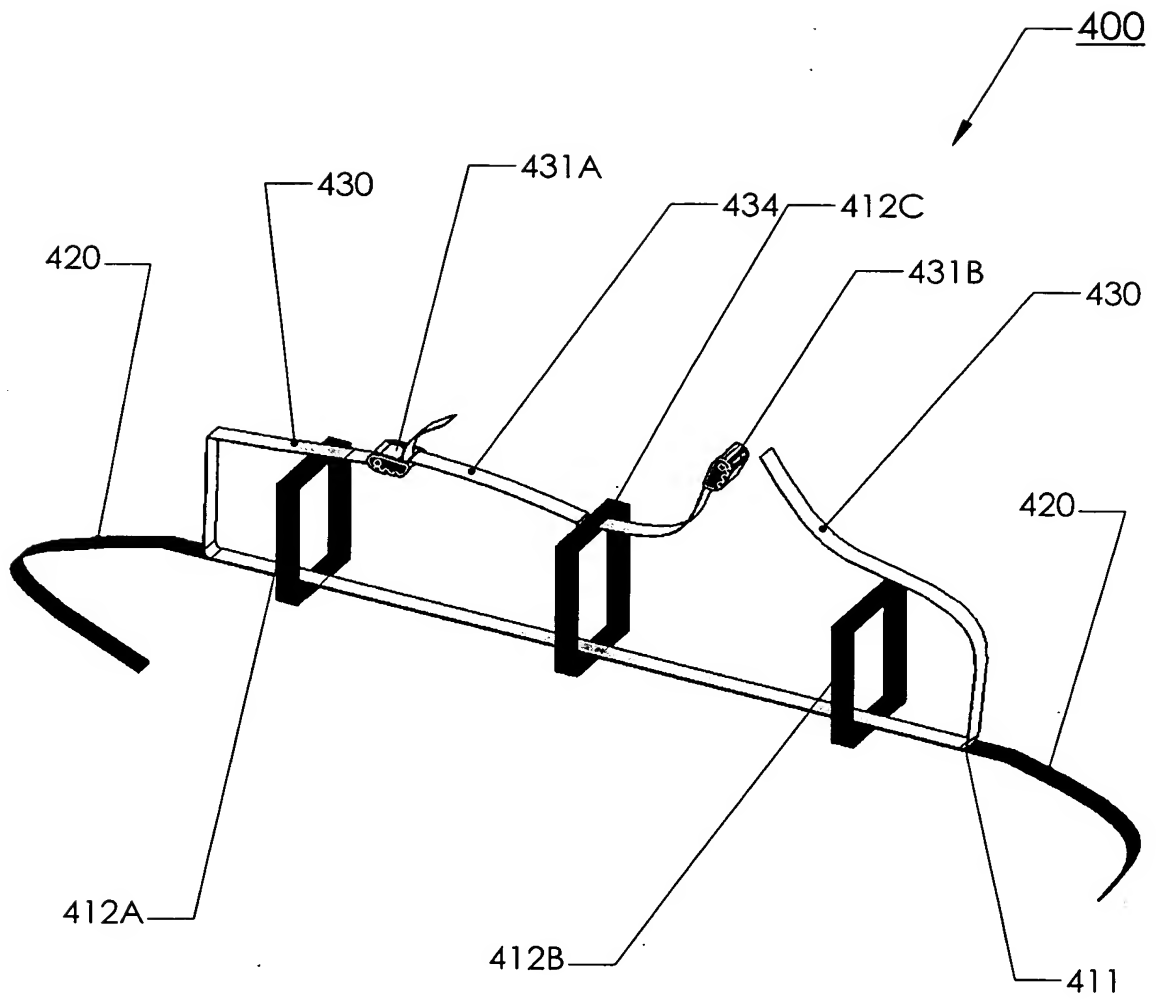


FIG. 5

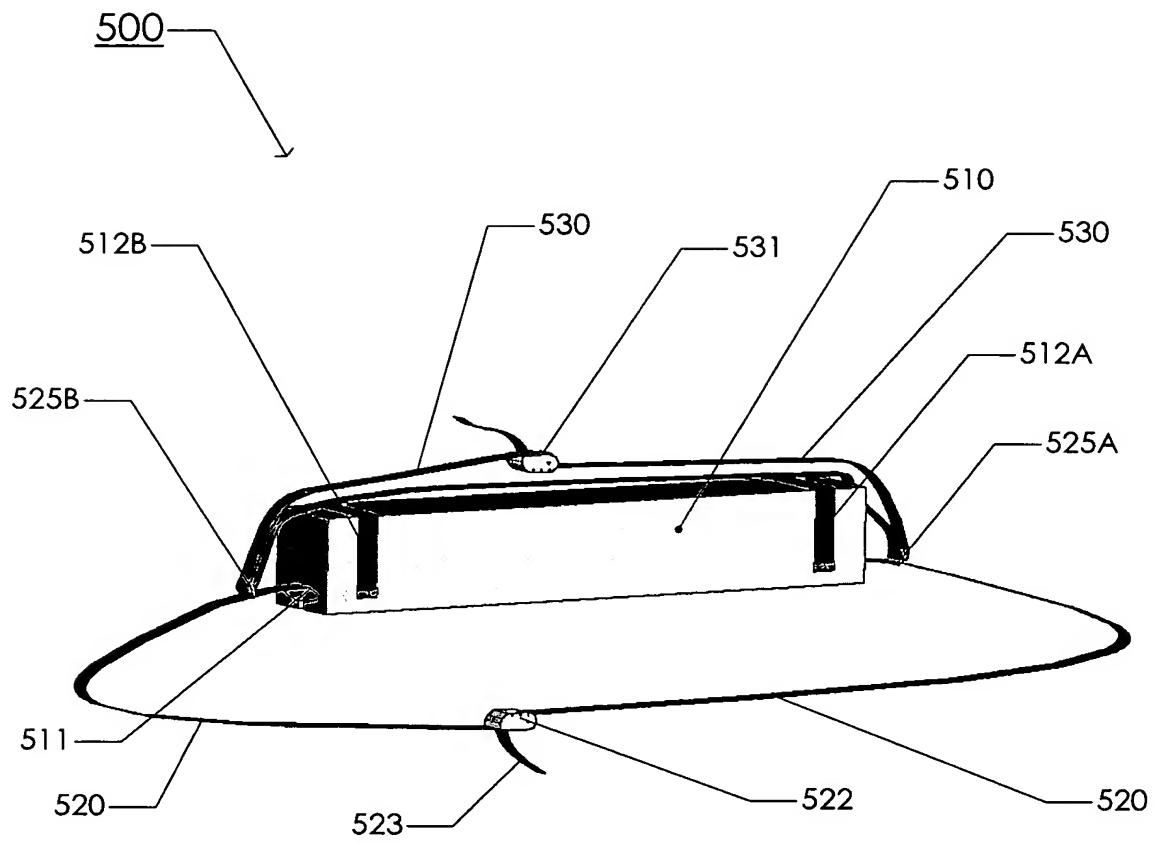


FIG. 6

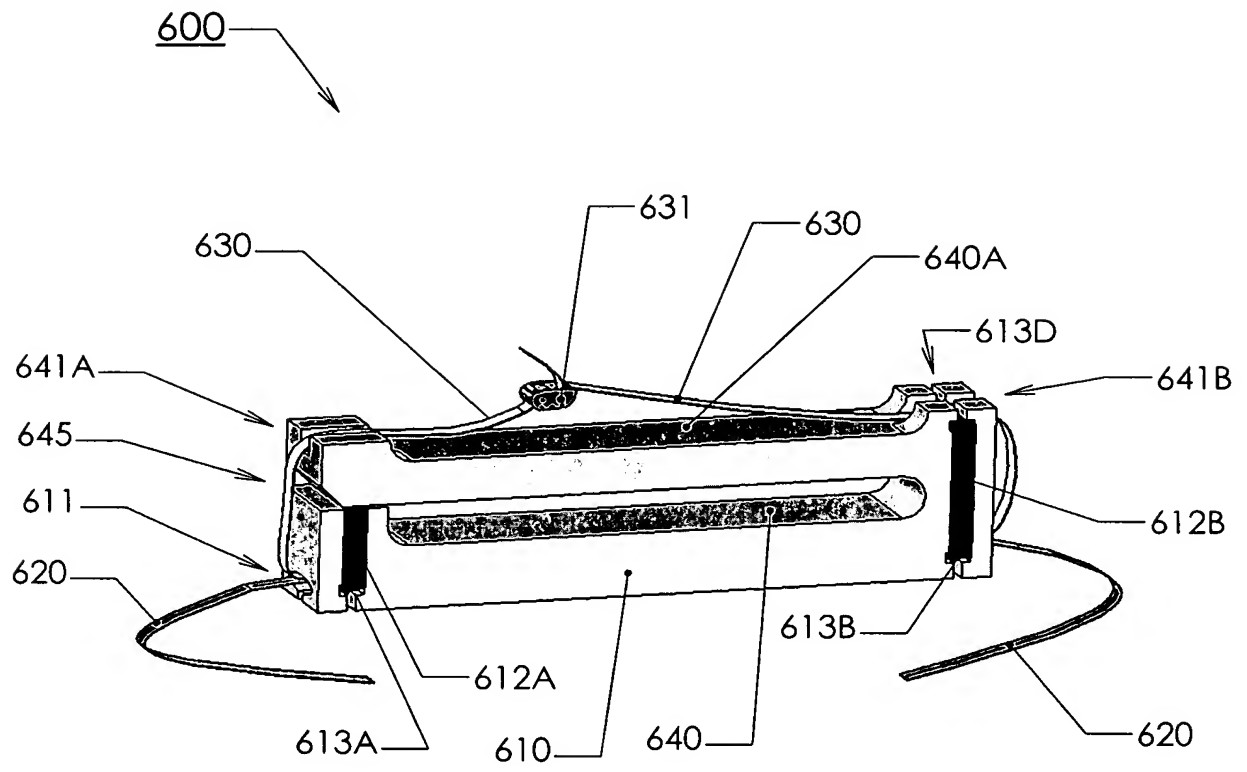




FIG. 7

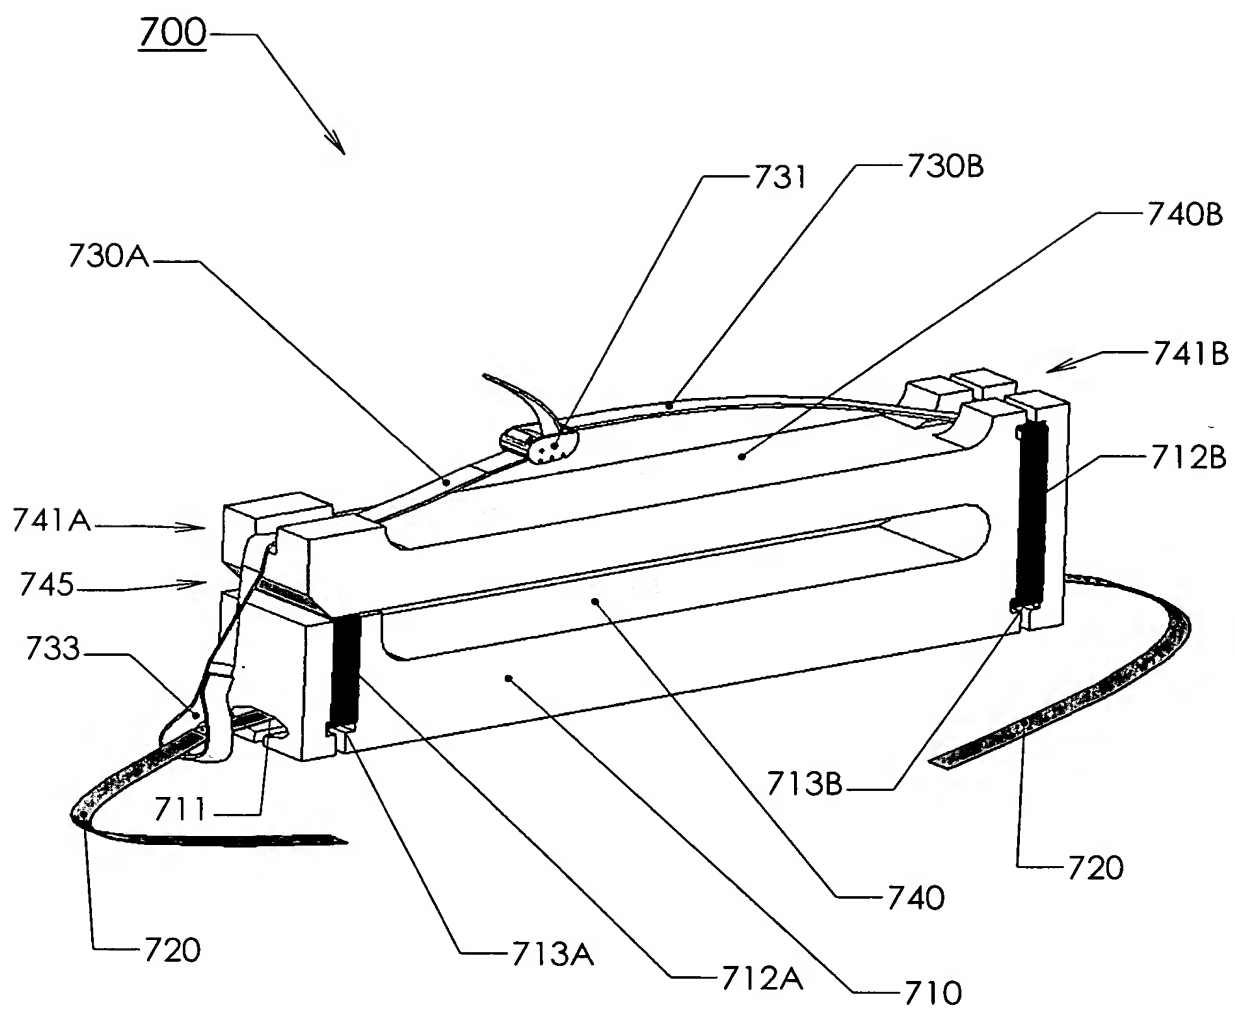


FIG. 8 is a perspective view of a second embodiment of the device, showing a curved, elongated structure. The structure is labeled with reference numerals 800B, 820, 825, and 813. The structure is shown in a perspective view, highlighting its curved, elongated shape. It features a central vertical section and two horizontal sections extending from it. The reference numeral 800B points to the overall structure, 820 points to the central vertical section, 825 points to the horizontal section, and 813 points to the curved, elongated structure.

FIG. 9

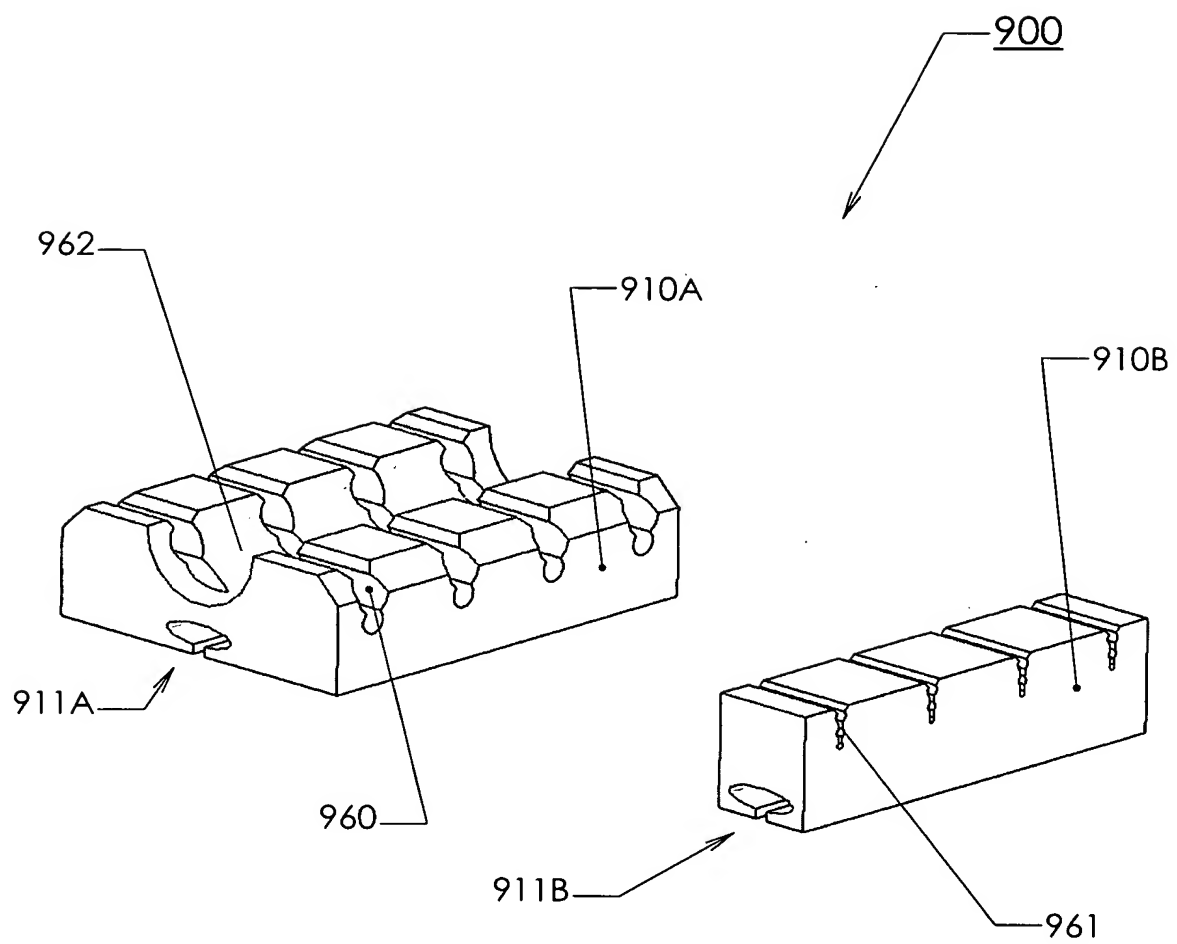


FIG. 10A

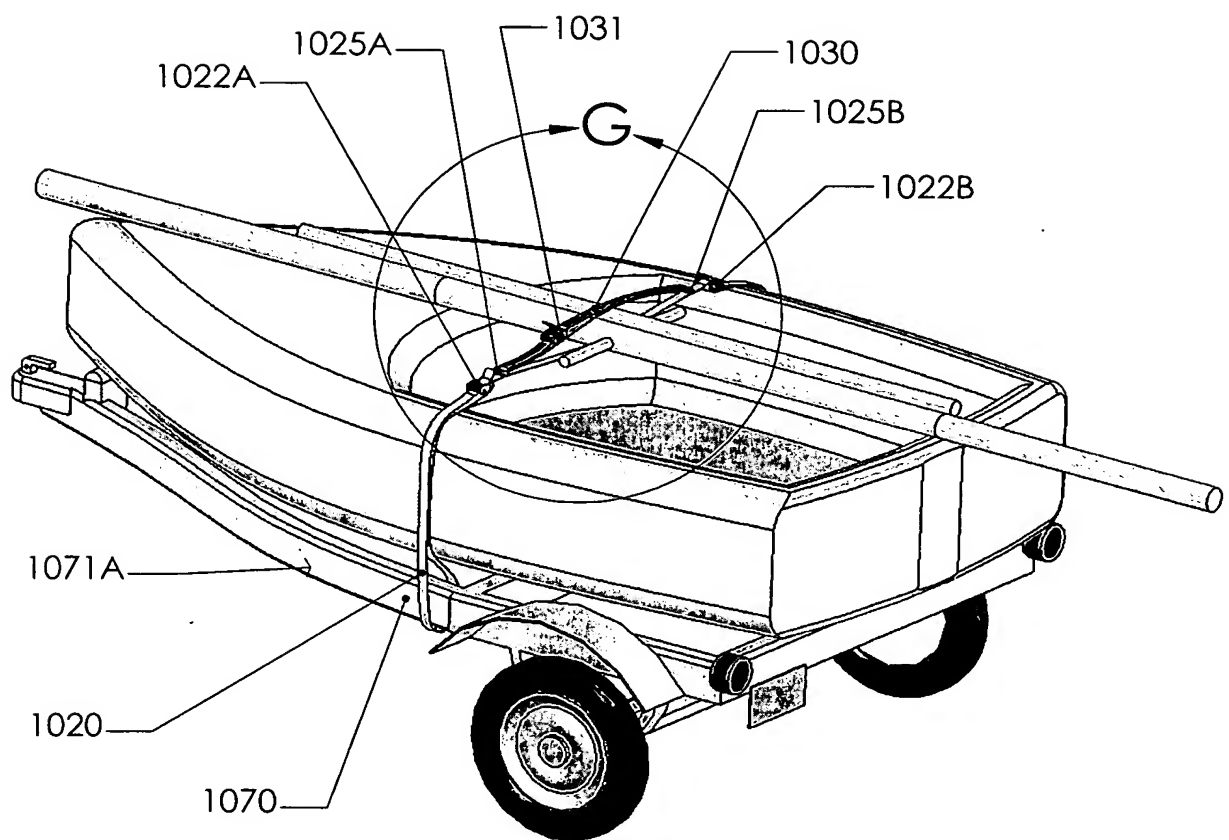


FIG. 10B  
(DETAIL G FROM FIG. 10A)

